


Finish for velvet seat cover fabrics for trains Film lamination

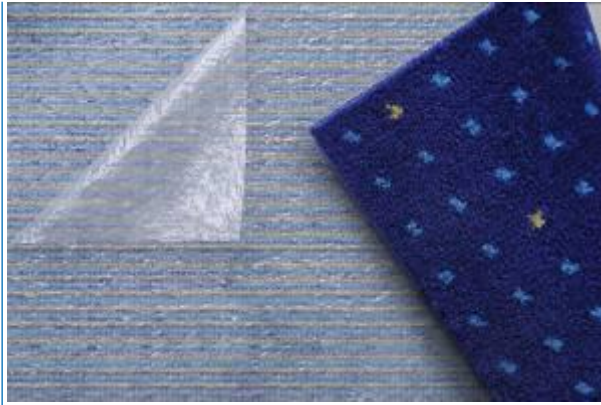

Key features

The application of a film on the back of the velvet fabric protects the seat upholstery and the foam against moisture and wetness. In the lamination process, the film is permanently bonded with the back side of the velvet.

The velvet seat cover fabric is impermeable to water: the film prevents the upholstery and the foam from absorbing liquids.

Application

The film lamination process is applicable exclusively to Lantal velvet seat cover fabrics made of 85% wool and 15% polyamide.

Velvet seat cover fabrics are film laminated only on request.

Specifications

Width	157 cm
Minimum qty.	750 linear meters, small quantities on request

Safety and standards

The Lantal standard velvet quality with the applied film is permanently flame-retardant and complies with the DIN 5510-2 fire standards and requirements.

Delivery

The film is durably applied to the back side of the velvet seat cover. The finished velvet fabric is delivered as yardage or as accurately precut, ready-to-fit parts.

Contact

Please contact us to discuss your requirements. We look forward to the opportunity of serving you.